

Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

**EP 0 994 270 A2**

(12)

**EUROPEAN PATENT APPLICATION**

(43) Date of publication:  
19.04.2000 Bulletin 2000/16

(51) Int. Cl.<sup>7</sup>: **F16F 1/368**, B60G 11/10,  
B60G 21/05, B60G 17/02

(21) Application number: 99203339.9

(22) Date of filing: 14.10.1999

(84) Designated Contracting States:  
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE**  
Designated Extension States:  
**AL LT LV MK RO SI**

(30) Priority: 16.10.1998 US 174281

(71) Applicant:  
**Delphi Technologies, Inc.**  
Troy, MI 48007 (US)

(72) Inventors:  
• **Gentry, Johnny Ray**  
Kettering, 45440 Ohio (US)  
• **Tao, Jason J.**  
Dayton, 45458 Ohio (US)


- **Graham, Bruce Patrick**  
Dayto, 45440 Ohio (US)
- **Lasserre, Laurent**  
95470 Survilliers (FR)
- **Annequin, Thierry**  
60700 Fleurines (FR)
- **Blancher, Jean-Marc**  
95650 Boissy l'Aillie (FR)
- **Derollepot, Olivier M.**  
75003 Paris (FR)

(74) Representative:  
**Denton, Michael John**  
Delphi Automotive Systems  
Centre Technique Paris  
117 avenue des Nations  
B.P. 60059  
95972 Roissy Charles de Gaulle Cedex (FR)

(54) **Vehicle wheel suspension with transverse leaf spring and mounts providing a high roll ratio**

(57) A vehicle wheel suspension has a composite, transversely oriented, leaf spring (20) which is vertically thick and stiff in end regions (23,24) extending inward from each end (21,22) of the spring past the vehicle body support area but is vertically thin and compliant in a middle region (25) between the end regions. The spring is constructed of a long, longitudinally aligned fiber and resin composite which is split at each outer end of the middle region into upper and lower horizontal layers (26,27,28,29) separated by a core (61,62) having a tapered inner end (63,64) and extending through the end region. The inserts provide the additional vertical

thickness in the end regions and may be made of a different material. The spring thus provides a high spring rate in roll in which, the center of the spring resists flexing and the spring attempts to flex in the thick end regions, with a low spring rate in heave in which the thin middle region of the spring flexes easily for a high roll ratio. The flexing of the spring in the middle, and thus the roll ratio, is additionally enhanced by providing pivoting and longitudinally translating body mounts for the spring. Two specific mount structures are described: a hybrid mount and a link mount.

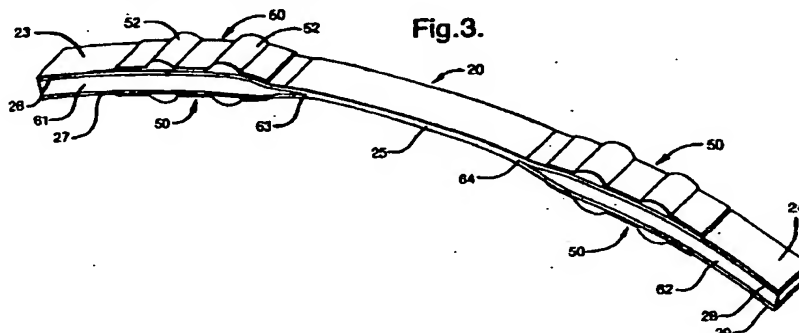

**EP 0 994 270 A2**

## D scripti n

### TECHNICAL FIELD

[0001] The technical field of this invention is a vehicle wheel suspension and particularly such a suspension using a transverse leaf spring.

### BACKGROUND OF THE INVENTION

[0002] A transverse leaf spring suspension, particularly using a composite leaf spring such as the fiberglass Liteflex<sup>®</sup> spring manufactured by Delphi Automotive Systems, can provide mass and space reduction in a vehicle wheel suspension. Such a suspension provides a single, transversely oriented leaf spring to provide both heave and roll compliance for a pair of wheels: one on each side of the vehicle. It is generally desirable that the ratio of spring rates in the roll and heave modes (roll ratio) be high, so that the suspension provides resistance to vehicle body roll in turns while remaining compliant in vertical motion to avoid harshness in ride. If a transverse leaf spring is used, each of these often conflicting goals must be addressed in the same spring.

[0003] The suspension apparatus of this invention is an improvement over the apparatus shown in U.S. Patent no. 4,768,807 to McGibbon et al, in which a standard composite leaf spring of uniform cross-sectional area is supported by a pair of mounts having pivot studs projecting fore and aft from a retainer clamped on the spring into a receptacle on a vehicle body cross member to provide a pivoting support with respect to the vehicle body. The pivoting mount of McGibbon et al reduces restriction on the flexing of a leaf spring in heave mode but still provides some restriction due to its low longitudinal translation compliance. In addition, it is complicated to manufacture, due to the necessity of the pivot axis being aligned with the spring shear axis.

### SUMMARY OF THE INVENTION

[0004] The suspension of this invention provides improvements to both the spring and the mounts of the prior art, which improve the roll ratio individually and in combination. The suspension comprises a composite, transversely oriented, leaf spring which is vertically thick and stiff in end regions extending inward from each end of the spring past the vehicle body support area but is vertically thin and compliant in a middle region between the end regions. This spring thus flexes easily in the heave mode, in which the thin middle region of the spring flexes vertically in opposition to each end. But the center of the spring resists flexing in the roll mode, in which the ends of the spring move vertically in opposition to each other and the spring attempts to flex in the thick end regions including the body support area. The spring thus provides a high spring rate in roll with a low

spring rate in heave for a high roll ratio.

[0005] Preferably, the spring is constructed of a long, longitudinally aligned fiber and resin composite which is split at each outer end of the middle region into upper and lower horizontal layers separated by a core having a tapered inner end and extending through the end region. The inserts provide the additional vertical thickness in the end regions without widening the middle region and may be made of a different material, such as a short, randomly oriented fiber and resin composite.

[0006] The roll ratio is preferably additionally enhanced by providing pivoting and longitudinally translating body mounts for the spring; and two specific structures for such mounts are described herein. The pivoting body mounts permit the greatest possible central flexure of the spring in heave mode, without introducing any increase in compliance in roll mode.

### BRIEF DESCRIPTION OF THE DRAWINGS

#### [0007]

FIG. 1 is an exploded view of a first embodiment of the invention using hybrid body mounts.

FIG. 2 is an exploded view of a second embodiment of the invention using linking body mounts.

FIG. 3 is a perspective view of a spring for use in the embodiment of FIG. 1.

FIG. 4 is an enlarged view of a hybrid body mount for use in the embodiment of FIG. 1.

### DESCRIPTION OF THE PREFERRED EMBODIMENT

[0008] Referring to FIG. 1, a sub-frame cross member 10 is transversely incorporated in a sprung body structure of a motor vehicle. Cross member 10 has well known structure 12 on each end for pivotally supporting the inboard ends of lower control arms 16 and 17, the outboard ends of which may be coupled by ball joints to the lower ends of knuckles, not shown, which rotatably support vehicle wheels, not shown, in a standard manner. The knuckles and wheels comprise unsprung wheeled suspension members which are constrained by lower control arms and an upper control arm or other members, not shown, to move generally vertically. The structure described above is well known in the art of vehicle suspension design.

[0009] A leaf spring 20 has ends 21 and 22 which are supported in depressions 224 and 225 respectively, of lower control arms 16 and 17, respectively. Spring 20 is further supported on the under side of cross member 10 by a pair of mounts 30 and 40. Mount 30 comprises a mount member 32 above spring 20, a mount member 35 below spring 20 and a bracket 38 affixed to cross member 10 and firmly retaining mount members 32 and 35 in contact with spring 20. Similarly, mount 40 comprises a mount member 42 above spring 20, a mount

member 45 below spring 20 and a bracket 48 affixed to cross member 10 and firmly retaining mount members 42 and 45 in contact with spring 20.

**[0010]** Mount members 32 and 35 of mount 30 are shown enlarged in FIG. 4. Each comprises a high modulus portion (33, 36) adjacent spring 20 and a low modulus portion (34, 37) adjacent cross member 10 or bracket 38, respectively. The high modulus portions have curved, convex surfaces adapted for rolling contact with the surface of spring 20 and are sufficiently dense and strong to maintain those surfaces under load. The low modulus portions are more compliant vertically for isolation and laterally for longitudinal translation. A dual density mount member may be made of a single material, such as urethane, having high and low modulus portions. Alternatively, the separate portions of the mount member may be made of separate materials bonded together. An example of the latter is a nylon or polycarbonate high modulus member affixed with an epoxy adhesive to a low modulus rubber member, with the nylon high modulus member being treated, such as by plasma treating, to facilitate the adhesive bonding. Member 40 is similarly constructed.

**[0011]** FIG. 3 shows spring 20 with further apparatus adapted for the hybrid mount of FIG. 1 and 4. Wherever one of the mount members 32, 35, 42, 45 contacts spring 20, a wear reducing pad 50 is preferably provided on spring 20 to reduce wear and prevent damage thereto. Pads 50 may also be provided with containment bumps 52 as shown to help control lateral movement of spring 20.

**[0012]** Spring 20 has three regions, as shown in FIG. 3. From each end, spring 20 has a substantial vertical thickness through an end region 23, 24. The end regions 23, 24 extend somewhat past the body support area where mounts 30 and 40 are affixed and provide a stiff spring rate therein. A middle region 25 of spring 20 joins end regions 23 and 24 and has a comparatively thin vertical thickness, which is much more vertically compliant. Thus, the structure of spring 20 provides a lower spring rate in middle region 25 for easier flexure and a higher spring rate in the end regions 23 and 24 for more stiffness and less flexure therein. Purely vertical (heave) motions of the vehicle body tend to move the middle of the spring in opposition to the ends thereof. Thus, heave motions of the vehicle body tend to produce flexure in the middle region 25 of spring 20, where it is most compliant. This provides a softer, more comfortable ride. Roll motions of the vehicle body, on the other hand, cause the ends of spring 20 to move vertically in opposition to each other. The forces induced in the spring from the oppositely moving ends tend to cancel in the middle and produce flexure in the end regions 23 and 24. But these regions are much less compliant, due at least in part to the increased thickness. Thus, the spring rate in roll is much higher.

**[0013]** The roll ratio of spring 20, as previously stated, is the ratio of the spring rates in roll and heave

modes:

$$\text{Roll ratio} = (\text{roll rate}) / (\text{heave rate}).$$

A high roll ratio is desired; and this can be obtained by increasing the roll rate (stiffer), decreasing the spring rate (more compliant) or both. With the structure described above, spring 20 provides increased stiffness in roll mode without a corresponding loss in compliance in heave mode, and thus increases the roll ratio. Finite element analysis indicates that, even with standard, fixed body mounts, spring 20 can achieve a roll ratio of 3.0, which is significantly better than the roll ratio of a standard composite leaf spring of constant cross-section and slightly better than a composite leaf spring of standard construction which has been vertically thinned (and widened) in the middle region.

**[0014]** The roll ratio is increased even further by the use of the pivoting and translating mounts 30 and 40. If spring 20 were clamped firmly to the vehicle body with fixed mounts, the pivoting motion of end regions 23 and 24 required for full flexure of the middle region 25 of spring 20 in heave motion would be constrained. But with spring 20 allowed to pivot in mounts 30 and 40 by the rounded, high modulus portions, heave motions of the vehicle body produce full flexure at the middle region 25 of spring 20, where it is most compliant. In addition, flexure of spring 20 produces a slight longitudinal variation in the length of the spring between the mounts, which would also tend to constrain spring flexure in middle region 25 if the mounts prevented such longitudinal movement. But the compliant, low modulus portions of hybrid mounts 30 and 40 allow the required small, longitudinal translations. The relatively unconstrained flexure of spring 20 in its middle region 25 which results from the pivoting and translating of hybrid mounts 30 and 40 significantly decreases the spring rate in heave mode but has little effect in roll mode; and the roll ratio is thus increased.

**[0015]** The thickened end regions 23 and 24 of spring 20 are provided by a unique construction. A normal composite leaf spring of the prior art comprises continuous and unidirectional fibers of glass, graphite, boron or another suitable material supported longitudinally in a resin and is constrained by standard manufacturing techniques to have a constant cross-sectional area throughout its length. Thus, a vertically thinner middle region would also be horizontally wider; and this places a practical limit on the vertical thickness ratio between the middle and end regions of the spring. But spring 20 herein splits the normal spring construction horizontally at each end into upper and lower layers (26, 27, respectively in end region 23 and 28, 29 respectively in end region 24) separated by a core 61 between layers 26 and 27 and a core 62 between layers 28 and 29. Cores 61 and 62 may be made of any suitable material which will maintain the vertical thickness through the end region under load. The material must bond well to

the outer layers and resist shear in bending, both at the material interface and internally. These properties must clearly persist throughout the normal range of expected temperatures and other environmental conditions. For example, a fiber filled resin composite using short, randomly oriented fibers may be used. Springs having somewhat varying properties may be made by varying the length or material of the fibers as well as the specific resin. Preferably, cores 61 and 62 have tapered inner ends 63 and 64, respectively.

**[0016]** A second embodiment of the invention is shown in FIG. 2. This embodiment uses a similar spring 120 but provides a different form of pivoting and translatable mount. Spring 120 has the same basic shape and construction as spring 20 of FIG. 3 and in fact may be identical, except that the pads 50 with bumps 52 are not used. A vehicle body cross-member 110 is provided with pivoting mounting structure 112 inward of each end. Spring 120 is provided with mounts 130 and 140 each comprising a rectangular clamping member 131, 141 respectively around the spring. Members 131 and 141 are similar to prior art mounts, including the use of standard isolating pads 150 between members 131 and 141 and the horizontal surfaces of spring 120, with one exception: pins 132 and 142 project horizontally outward from the front (shown) and rear (not shown) of the members 131 and 141, below spring 120.

**[0017]** Each of mounts 130 and 140 finally comprises a pair of links (133, 134 and 143, 144, respectively) pivotally coupled at the upper end to mounting structure 112 of cross-member 110 with a common upper pivot axis and at the lower end to pins 132 and 142, respectively of mounts 130 and 140 with a common lower pivot axis parallel to the upper pivot axis. Links 133, 134, 143, 144, pivoting at both the spring end and body end, provide the pivoting and longitudinal translation required for full flexure of spring 120 in heave mode and thus a high roll ratio, perhaps even more than that of the apparatus of FIG. 1. Finite element analysis indicates a roll ratio as high as 7.1 for the apparatus of FIG. 2. As an additional advantage, the structure of this mount allows the pivot axis of spring 120, defined by the axis of pins 132 (or 142), to be located freely with respect to the shear axis of the spring. In the prior art U.S. Patent No. 4,768,807 mentioned previously, the pivot axis of the spring was constrained to be in alignment with the shear axis of the spring. In the mount of FIG. 2 described herein, the pivot axis is below the spring, which permits a more compact packaging of the suspension. In addition, it allows a simpler construction of member 131, in which pins 132 may be embodied in a single member affixed to, and projecting both fore and aft from, the bottom of a rectangular bracket (likewise for member 141 and pins 142). Furthermore, each pair of links (133, 134 and 143, 144) could be joined into a single linking member, if desired.

## Claims

1. A wheel suspension for a motor vehicle having a sprung body member 10 between a pair of unsprung wheeled suspension members 17, the suspension comprising, in combination:

a leaf spring 20 oriented transversely across the vehicle body member and coupled at each end to one of the unsprung wheeled suspension members, the leaf spring having an end region 23, 24 extending inwardly from each end thereof and joined by a middle region 25, the leaf spring being vertically thin and compliant in the middle region and vertically thick and stiff in each end region; and a pair of body mounts 30, 40 coupling the leaf spring to the sprung body member in a pivoting and longitudinally translating manner in spring support areas within the end regions inboard of the ends of the leaf spring.

2. The suspension of claim 1 in which the leaf spring comprises a plurality of continuous and unidirectional fibers in a resin composite forming a vertically thin and compliant middle region 25, the longitudinal member being split at each end of the middle region into a pair of horizontal layers separated vertically by a core comprising a different material producing thick and stiff end regions 23, 24 extending from each end of the middle region, the middle and end regions being of substantially the same horizontal width.
3. The suspension of claim 1 in which at least one of the body mounts comprises a pair of mount members, one 35 below the spring and the other 32 above the spring, each of the mount members comprising a high modulus portion 36, 33 having a convex, curved surface against the spring allowing rolling movement therebetween and a low modulus portion 37, 34 in contact with the body allowing longitudinal translation therebetween, whereby flexure of the spring in heave mode is facilitated.
4. The suspension of claim 1 in which at least one of the body mounts comprises, in combination:

a pair of clamping members 131, 141 affixed to the spring, each of the clamping members having axially aligned pins 132, 142 extending fore and aft therefrom and defining a pivot axis; and a linking apparatus 133, 134, 143, 144 coupled at one end pivotally to the axially aligned pins of one of the clamping members and at the other end pivotally to the vehicle body member, the linking apparatus permitting essentially unrestricted rotation of the spring about the

parallel pivot axes and longitudinal translation of the pivot axis, whereby flexure of the spring in the heave mode is facilitated.

5. A mount for coupling a transverse leaf spring 20 to a body member 10 in a wheeled vehicle suspension, the mount comprising a pair of mount members, one 35 below the spring and the other 32 above the spring, each of the mount members comprising a high modulus portion 36, 33 having a convex, curved surface against the spring allowing rolling movement therebetween and a low modulus portion 37, 34 in contact with the body allowing longitudinal translation therebetween, whereby flexure of the spring in heave mode is facilitated.
  - 5
  - 10
  - 15
6. A mount for coupling a transverse leaf spring 20 to a body member 10 in a wheeled vehicle suspension, the mount comprising, in combination:
  - 20
  - a pair of clamping members 131, 141 affixed to the spring, each of the clamping members having axially aligned pins 132, 142 extending fore and aft therefrom and defining parallel pivot axes;
    - 25
    - a first linking apparatus 133, 134 coupled at one end pivotally to the axially aligned pins of one of the clamping members and at the other end pivotally to the vehicle body member; and
    - 30
    - a second linking apparatus 143, 144 coupled at one end pivotally to the axially aligned pins of the other of the clamping members and at the other end pivotally to the vehicle body member, the first and second linking apparatus permitting essentially unrestricted rotation of the spring about the parallel pivot axes and longitudinal translation of the parallel pivot axes, whereby flexure of the spring in the heave mode is facilitated.
      - 35
      - 40
  7. The suspension of claim 6 in which the linking apparatus comprises a pair of links 133, 134, fore and aft the spring and pivoting at the spring end in a first common axis and at the body end in a second common axis, the first and second common axes being parallel to each other.
    - 45
  8. A leaf spring for a wheeled vehicle suspension having a longitudinal member 20 comprising a plurality of continuous and unidirectional fibers in a resin composite forming a vertically thin and compliant middle region 25, the longitudinal member being split at each end 23, 24 of the middle region into a pair of horizontal layers 26, 27, 28, 29 separated vertically by a core 61, 62 comprising a different material producing thick and stiff end regions extending from each end of the middle region, the middle and end regions being of substantially the
    - 50
    - 55

same horizontal width, the spring thus providing a high roll ratio for a wheeled vehicle when supported at its ends in unsprung wheel members of the vehicle and in the end regions inboard of the ends on the body of the wheeled vehicle.




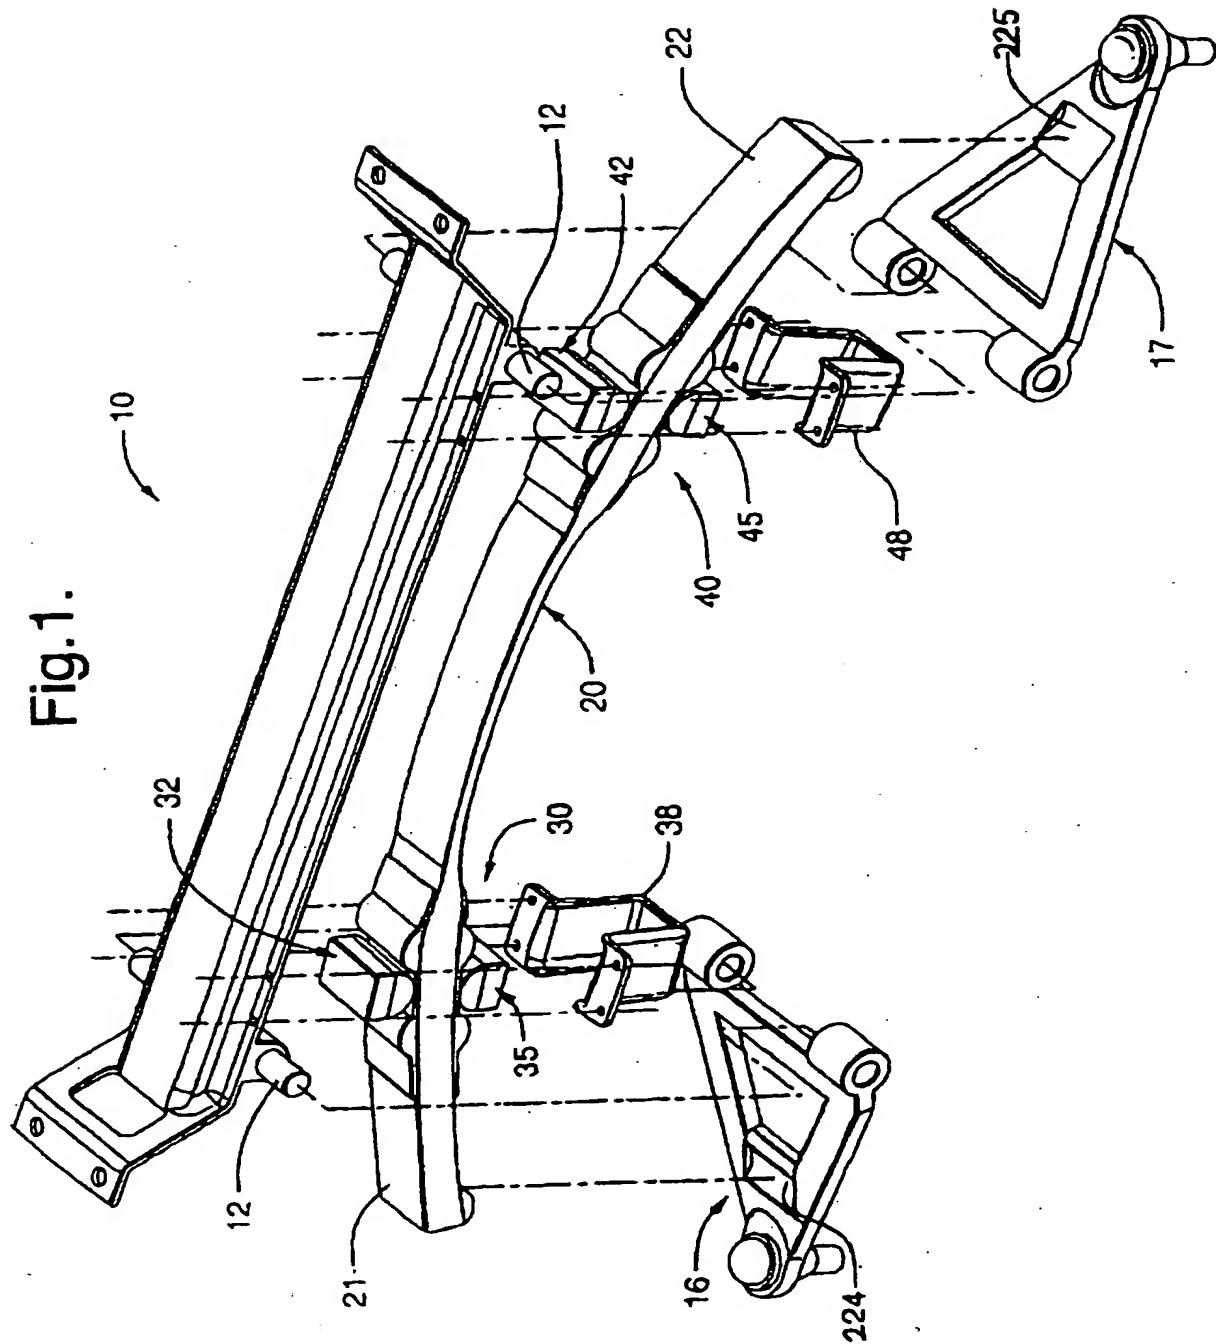


Fig. 1.

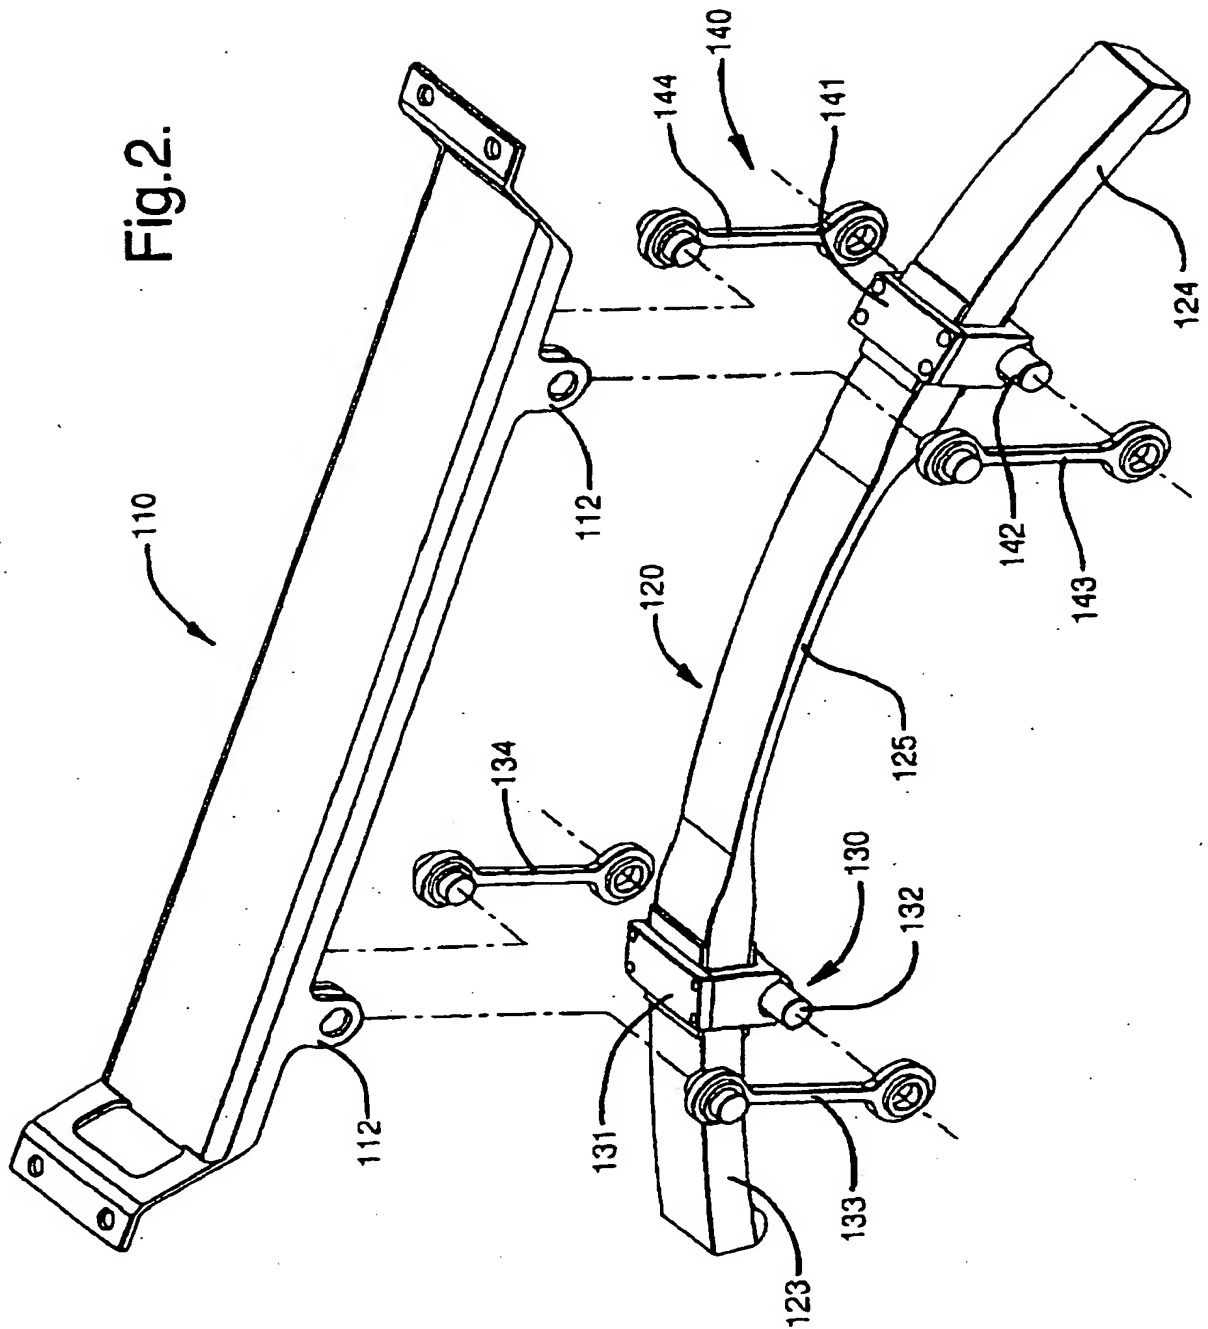

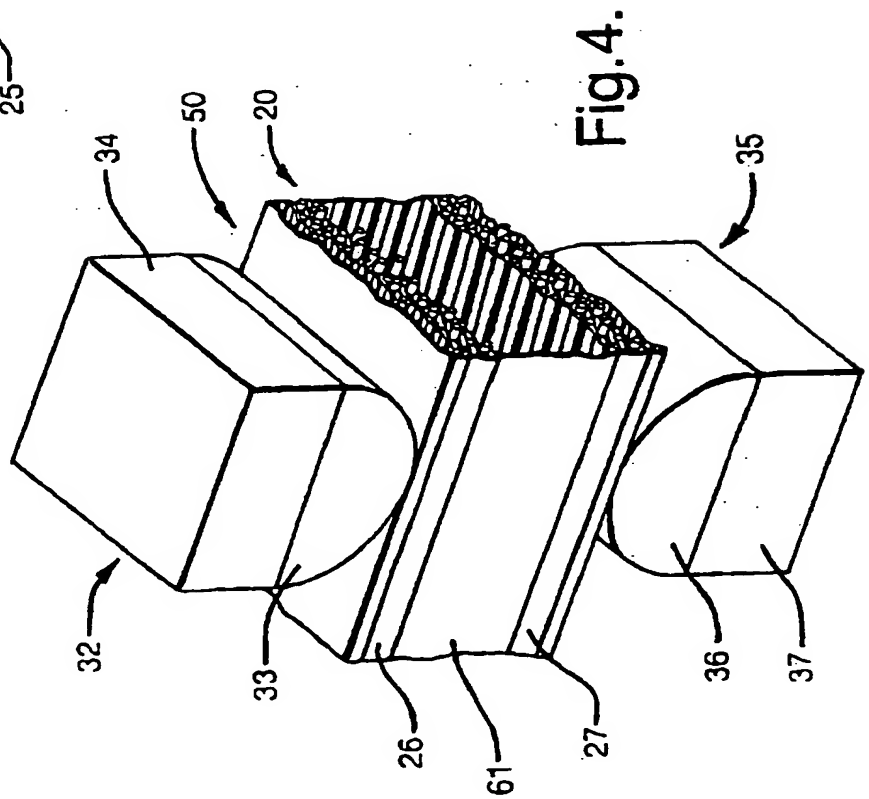

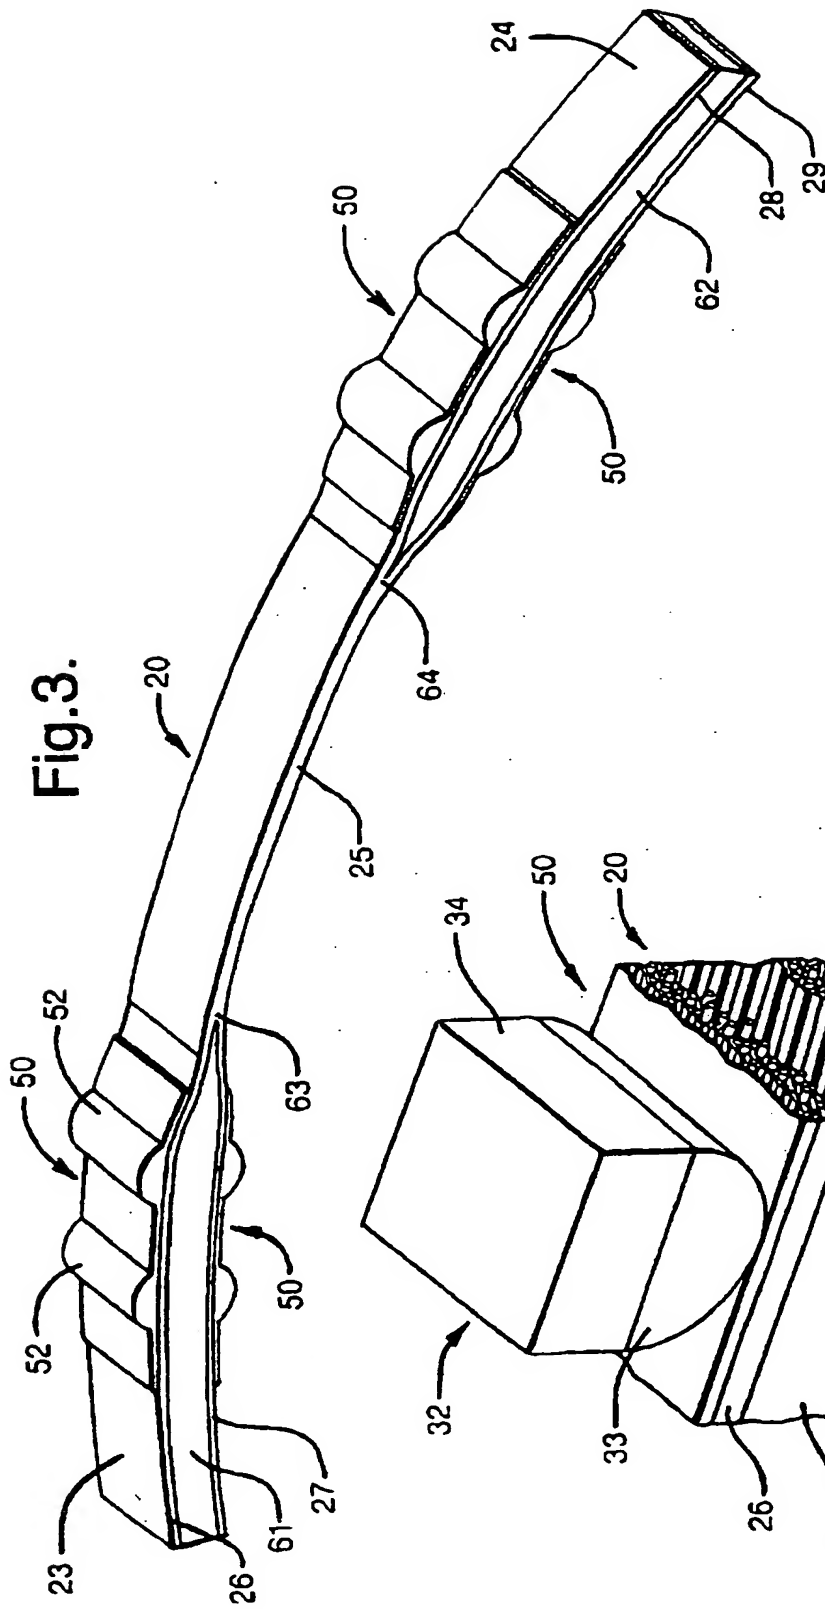

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

**EP 0 994 270 A3**

(12)

**EUROPEAN PATENT APPLICATION**

(88) Date of publication A3:  
18.04.2001 Bulletin 2001/16

(51) Int. Cl.<sup>7</sup>: **F16F 1/368**, B60G 11/10,  
B60G 21/05, B60G 17/02

(43) Date of publication A2:  
19.04.2000 Bulletin 2000/16

(21) Application number: 99203339.9

(22) Date of filing: 14.10.1999

(84) Designated Contracting States:  
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE**  
Designated Extension States:  
**AL LT LV MK RO SI**

- Graham, Bruce Patrick  
Dayto, 45440 Ohio (US)
- Lasserre, Laurent  
95470 Survilliers (FR)
- Annequin, Thierry  
60700 Fleurines (FR)
- Blancher, Jean-Marc  
95650 Boissy l'Aillie (FR)
- Derollepot, Olivier M.  
75011 Paris (FR)

(30) Priority: 16.10.1998 US 174281


(71) Applicant:  
Delphi Technologies, Inc.  
Troy, MI 48007 (US)

(74) Representative:  
Denton, Michael John  
Delphi Automotive Systems  
Centre Technique Paris  
117 avenue des Nations  
B.P. 60059  
95972 Roissy Charles de Gaulle Cedex (FR)

(72) Inventors:  
• Gentry, Johnny Ray  
Kettering, 45440 Ohio (US)  
• Tao, Jason J.  
Dayton, 45458 Ohio (US)

**(54) Vehicle wheel suspension with transverse leaf spring and mounts providing a high roll ratio**

(57) A vehicle wheel suspension has a composite, transversely oriented, leaf spring (20) which is vertically thick and stiff in end regions (23,24) extending inward from each end (21,22) of the spring past the vehicle body support area but is vertically thin and compliant in a middle region (25) between the end regions. The spring is constructed of a long, longitudinally aligned fiber and resin composite which is split at each outer end of the middle region into upper and lower horizontal layers (26,27,28,29) separated by a core (61,62) having a tapered inner end (63,64) and extending through the end region. The inserts provide the additional vertical thickness in the end regions and may be made of a different material. The spring thus provides a high spring rate in roll in which, the center of the spring resists flexing and the spring attempts to flex in the thick end regions, with a low spring rate in heave in which the thin middle region of the spring flexes easily for a high roll ratio. The flexing of the spring in the middle, and thus the roll ratio, is additionally enhanced by providing pivoting and longitudinally translating body mounts for the spring. Two specific mount structures are described: a hybrid mount and a link mount.

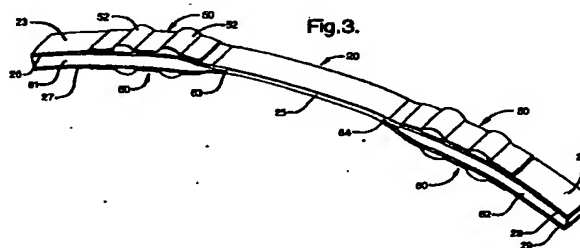**EP 0 994 270 A3**



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 99 20 3339

DOCUMENTS CONSIDERED TO BE RELEVANT				
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)	
Y	EP 0 383 669 A (BERTIN & CIE) 22 August 1990 (1990-08-22)	8	F16F1/368 B60G11/10 B60G21/05 B60G17/02	
A	* the whole document *	1		
Y	EP 0 005 916 A (GKN GROUP SERVICES LTD) 12 December 1979 (1979-12-12)	8		
A	* page 8, line 32 - page 9, line 11; figures 11,12,14 *	1,2		
X	PATENT ABSTRACTS OF JAPAN vol. 016, no. 250 (M-1262), 8 June 1992 (1992-06-08) & JP 04 059406 A (HONDA MOTOR CO LTD), 26 February 1992 (1992-02-26)	5		
Y	* abstract; figures 1,2B,8 *	1,3		
Y	WO 87 01339 A (GKN TECHNOLOGY LTD) 12 March 1987 (1987-03-12)	1,3		
Y	US 5 251 930 A (KAJIWARA HAJIME ET AL) 12 October 1993 (1993-10-12)	6,7		TECHNICAL FIELDS SEARCHED (Int.Cl.7)
A	* abstract; figures 2-4,7-9,13 *	1,3,4		F16F B60G
Y	FR 2 733 464 A (RENAULT) 31 October 1996 (1996-10-31)	6,7		
A	* abstract; figures *	1		
A	US 4 278 726 A (WIEME ANDRE) 14 July 1981 (1981-07-14)	2,8		
Y	WO 86 02886 A (GKN TECHNOLOGY LTD) 22 May 1986 (1986-05-22)	5		
A	* page 5, paragraph 1 - paragraph 2; figures *	1,3		
		-/--		
The present search report has been drawn up for all claims				
Place of search <b>THE HAGUE</b>		Date of completion of the search <b>28 February 2001</b>	Examiner <b>Tsitsilonis, L</b>	
<p><b>CATEGORY OF CITED DOCUMENTS</b></p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons</p> <p>&amp; : member of the same patent family, corresponding document</p>				

EPO FORM 1503 03.02 (P04C01)



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 99 20 3339

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
Y	GB 785 404 A (MASCHINENFABRIK AUGSBURG-NURNBERG) 30 October 1957 (1957-10-30) * figure *	5	
A	PATENT ABSTRACTS OF JAPAN vol. 006, no. 184 (M-157), 21 September 1982 (1982-09-21) & JP 57 090439 A (HINO MOTORS LTD), 5 June 1982 (1982-06-05) * abstract *	3, 5	
P, X	EP 0 881 106 A (PORSCHE AG) 2 December 1998 (1998-12-02)	1	
P, A	* the whole document *	2, 3, 5	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
The present search report has been drawn up for all claims			
Place of search <b>THE HAGUE</b>		Date of completion of the search <b>28 February 2001</b>	Examiner <b>Tsitsilonis, L</b>
<b>CATEGORY OF CITED DOCUMENTS</b> X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03.82 (P44C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 99 20 3339

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

28-02-2001

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0383669 A	22-08-1990	FR 2643025 A	17-08-1990
		AT 87550 T	15-04-1993
		DE 69001184 D	06-05-1993
		DE 69001184 T	08-07-1993
EP 0005916 A	12-12-1979	GB 2021731 A	05-12-1979
		AU 4692279 A	29-11-1979
		BR 7903235 A	11-12-1979
		DK 217379 A	27-11-1979
		ES 254559 Y	01-04-1982
		JP 54158562 A	14-12-1979
		ZA 7902403 A	25-06-1980
JP 04059406 A	26-02-1992	JP 2845581 B	13-01-1999
WO 8701339 A	12-03-1987	EP 0276210 A	03-08-1988
		ES 2002292 A	01-08-1988
		GB 2198998 A,B	29-06-1988
		JP 63501492 T	09-06-1988
US 5251930 A	12-10-1993	US 4779894 A	25-10-1988
		JP 2612642 B	21-05-1997
		JP 4237612 A	26-08-1992
		DE 4201180 A	23-07-1992
FR 2733464 A	31-10-1996	FR 2671762 A	24-07-1992
		NONE	
US 4278726 A	14-07-1981	LU 80296 A	21-04-1980
		BE 879030 A	27-03-1980
		BE 882333 A	22-09-1980
		DE 2939420 A	17-04-1980
		FR 2437530 A	25-04-1980
		GB 2034634 A,B	11-06-1980
		IT 1120025 B	19-03-1986
		JP 1266644 C	27-05-1985
		JP 55069446 A	26-05-1980
		JP 59040101 B	28-09-1984
WO 8602886 A	22-05-1986	EP 0230416 A	05-08-1987
		ES 290185 Y	16-10-1986
		GB 2191262 A	09-12-1987
GB 785404 A		DE 946949 C	
		FR 1138159 A	11-06-1957

EPO FORM P448

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 99 20 3339

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

28-02-2001

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
JP 57090439 A	05-06-1982	JP 1373988 C	07-04-1987
		JP 61040850 B	11-09-1986
EP 0881106 A	02-12-1998	DE 19721878 A	10-12-1998
		JP 10329520 A	15-12-1998
		US 6029987 A	29-02-2000



INVESTOR IN PEOPLE

Application No: GB 0211357.9  
Claims searched: 1-11, 22-27 & 31

Examiner: Kevin Hewitt  
Date of search: 12 October 2002

## Patents Act 1977 Search Report under Section 17

### Databases searched:

UK Patent Office collections, including GB, EP, WO & US patent specifications, in:

UK Cl (Ed.T): B7D (DSCF, DSCJ, DSCX); F2S (SCB, SCG)

Int Cl (Ed.7): B60G 11/02, 11/04; F16F 1/18, 1/20, 1/22, 1/366, 1/368; L60G 206/7101

Other: Online WPI, EPODOC, JAPIO

### Documents considered to be relevant:

Category	Identity of document and relevant passage	Relevant to claims
A	EP 0994270 A2 (DELPHI) See especially Figs 1 and 2.	-
A	US 6435485 B1 (GRECO) See composite spring 12 in Figs 1 and 3.	-
X	US 5938221 A (WILSON) See leaf spring 14 in Figs 1 to 4.	1,4,5,22-24
A	JP 590089839 A (NHK SPRING) See especially Figs 1, 3 and 5 and abstract.	-

X Document indicating lack of novelty or inventive step  
Y Document indicating lack of inventive step if combined with one or more other documents of same category.

& Member of the same patent family

A Document indicating technological background and/or state of the art.  
P Document published on or after the declared priority date but before the filing date of this invention.  
E Patent document published on or after, but with priority date earlier than, the filing date of this application.